


MPO 4Card in One Rack Mount

Products Picture:

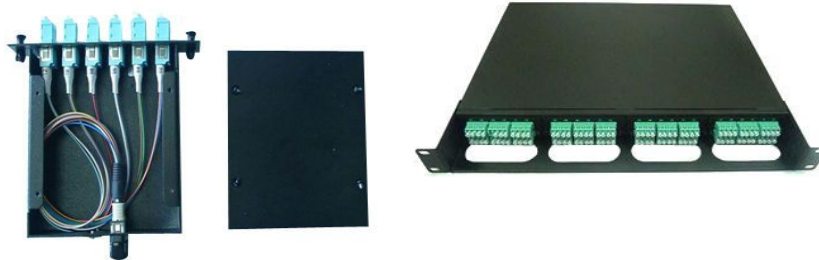

Description:

1. One LGX box with 2pcs of 12C patch cord.
2. Patch cord specification:

No.	Item	Applicable
1	Connector Type	Male (with Pins); Female(without guide pin);
2	Connector Form	LC/PC
3	Number of Fiber Holes	12 Core
4	Housing Color	AQ: Aqua (MM 50/125 OM3 grade)
5	Cable type	12C Ribbon Jacket
6	Length	0.5m
7	Pigtail	0.4m
8	Cable diameter	φ 3.0

3. MPO Connector Technical Parameter:

Number of cores		12
MPO Connector		MM Standard
Insertion Loss (dB)	Typical	≤0.35
	Max	≤0.6
Return Loss		≥20
Male/Female		Male With Pins; Female Without Pins
Exchangeability (dB)		≤0.3
Temperature Range (dB)		≤0.2 (-40℃~+85℃)

MPO LGX Parameter

Insertion Loss(dB)	≤1.0dB
Return Loss(dB)	≥20

Front Look




Back Look



MPO Rack Mount:

1. Size: 431(L)x44(H)x250(W)mm
2. Material: SPCC
3. Color: Black
4. 4pcs of LGX in one Rack.

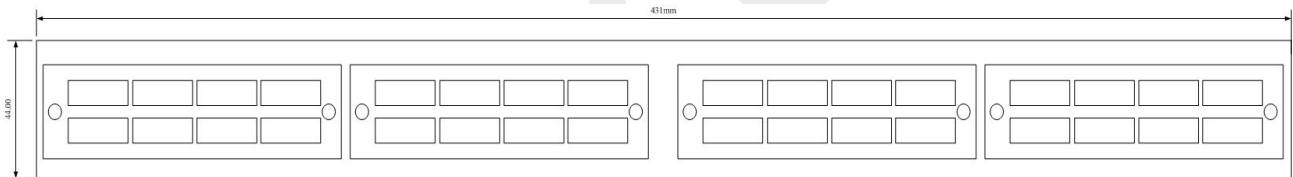

Front Look



Back Look

