


8/16-Core FTTH Terminal Box

— Blockless Splitter Structure

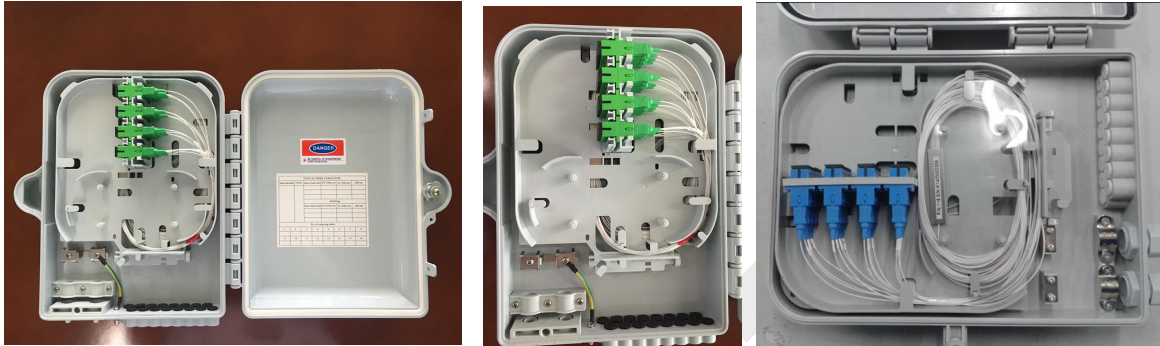

Fiber Optic Terminal Box is widely used in FTTH, CATV, LAN and WLAN project

Features

- High-quality ABS with standard interface
- Maximum Capacity: up to 1*16 PLC Splitter or 16 cores input and 16 cores output
- In accordance with IP65
- Wall Mountable and Derrick Mountable

Specifications

Model	Size(Length*Width*Height)	No. of Input	No. of Output	Input/output Hole Size (mm)	Maximum Capacity	Note
8/16	300*220*80	2	16	Input Φ12, Output drop cable	16 cores	ABS Box, can be fitted with 16pcs SC Adapters

Standard Packaging

Item	Specs	Total Q'ty of Splitter	Carton Size (cm)	Gross Weight per Piece (kgs)
WALL-mounted PLC splitter with blockless type in it	1x8	10	60*37*51	1.32
		15	81*36*52	
WALL-mounted PLC splitter with blockless type in it	1X16	10	60*37*51	1.37
		15	81*36*52	

Tel: +86 519 86221538

Fax: +86 519 86226698

Web: www.linketchina.com

Add.: No. 3 Longwo Road, Wujin High-Tech Development Zone, Changzhou, Jiangsu, China, 213161